


FGA-345-HD

Automotive-type Radio Adapter for JMCB-2003

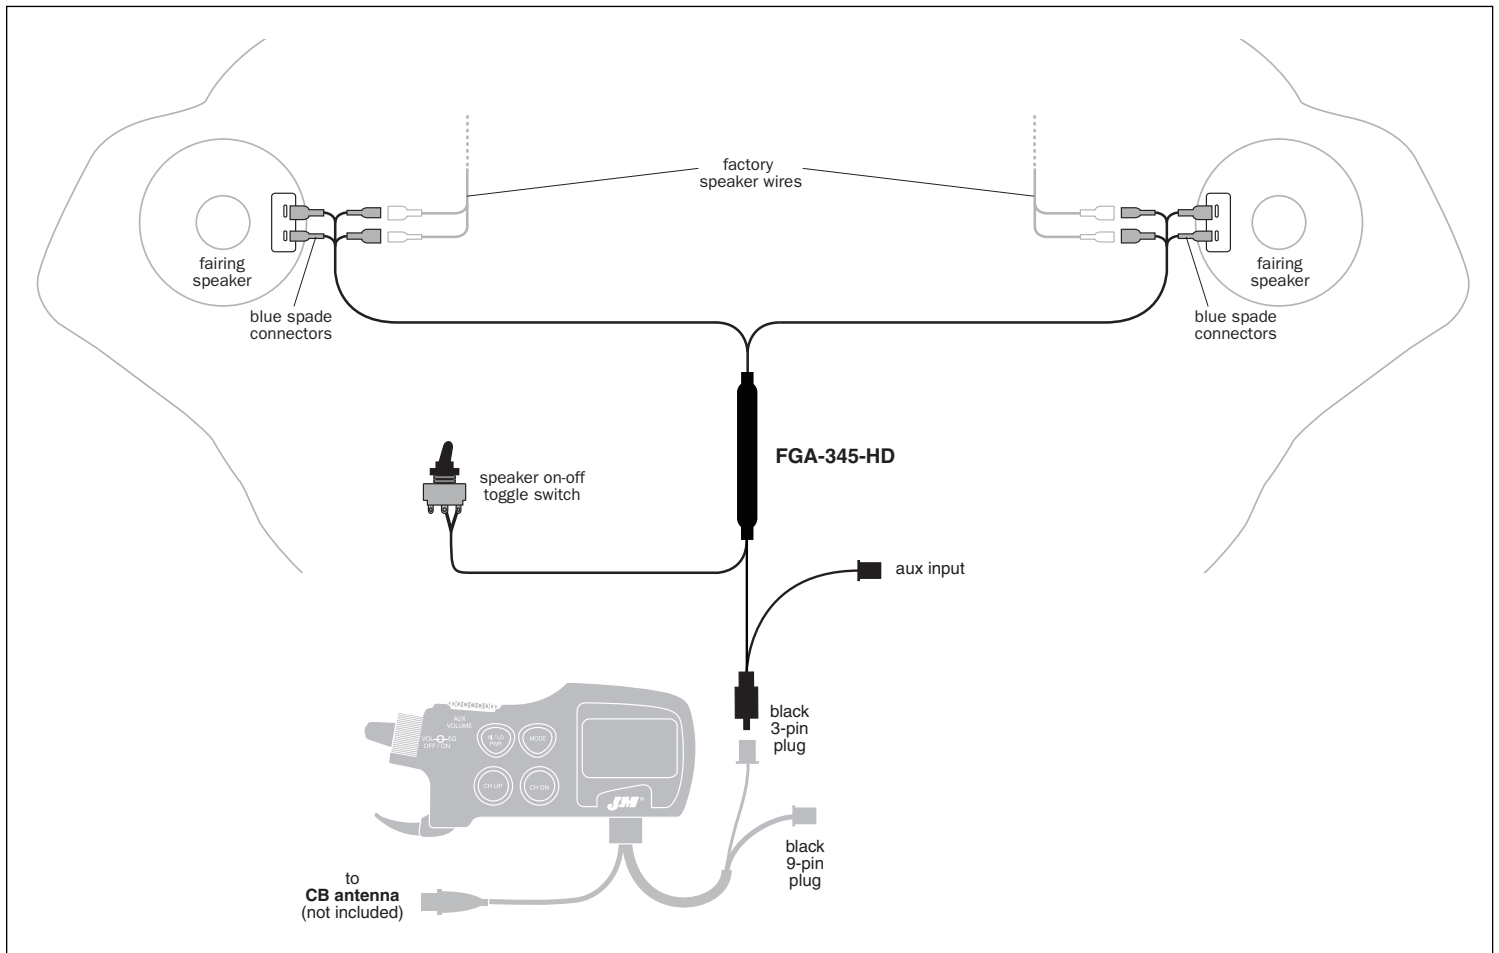

Installation and Operation Instructions

Equipment Description

This kit provides an adapter cable to connect the JMCB-2003 to an automotive-type or factory installed radio.

Installation

- 1) Disconnect the stock speaker wires from the speakers and connect the J&M FGA-345-HD speaker wires to the speakers. Then connect the stock speaker wires to the remaining corresponding connectors from the FGA-345-HD unit.
- 2) Mount the speaker on-off toggle switch in a suitable location in the inner fairing. (the lower right hand corner opposite the cigarette lighter is the suggested location.)
- 3) Route the FGA-345-HD adapter harness to the JMCB-2003 and plug into the 3-pin plug.

Thank you for the confidence you have shown by purchasing one of J&M's innovative products. If you have any questions during the installation, or require further assistance, you may call us at 1-800-358-0881 from 8:00 a.m. to 5:00 p.m. Mountain Standard Time, Monday through Friday.



1415 S. Cherry Avenue
Tucson, Arizona 85713-1997
Tel: (520) 624-7000
Fax: (520) 624-6202
Email: audio@jmc Corp.com
Web: <http://www.jmc Corp.com>