



49" Floor-Stand Infrared Touch Digital Signage



High-Performance
Chip

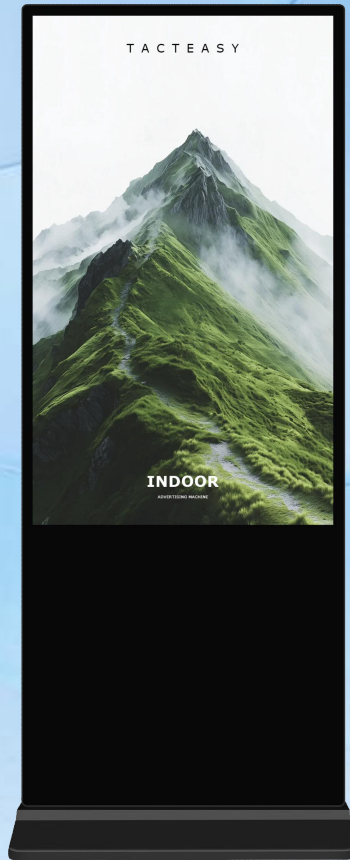

Large Storage
Capacity



Low Power
Consumption



Infrared Touch
Control



Diverse Network
Connectivity



High Durability



Powerful Audio
Output



Easy Installation

Product Series	
Model number	TP-49
Display	
LCD Size	49"
Display size	1075×606mm
Display Brand	BOE / COST
Resolution	1920×1080
Brightness	500~1500cd
Contrast	1200: 1
Refresh Rate	60Hz
Response time	6ms
Motherboard Spec (optional)	
Chipset	RK3568
CPU architecture	Cortex-A55×4 2.0Ghz
CPU Core	Quad Core
RAM	2GB
ROM	32GB
OS	Android11.0
Port	1* Audio, 2*USB, 1*TF Card, 1*HDMI OUT
Motherboard Spec (optional)	
Chipset	I3-11 TH / I5-11 TH / I7-11 TH
RAM	4GB/8GB
ROM	128G/256GB/512GBSSD,500GB/1TB HDD
OS	Windows10/Windows11(unactivated)
Electrical Spec	
Power Requirements	AC 100-240V , 50/60 Hz
Power Consumption	65W/80W/95W/105W
Standby Frequency	≤0.5W
Audio Output Power	8Ω / 8W×2

Network support	
WI-FI Standard	Built-in WiFi and Bluetooth.
Ethernet	Support 10/100M adaptive Ethernet
4G network(optional)	Expandable 4G internet access(unactivated)
Touch control parameters	
Technology	Infrared Touch
Surface Protection	3mm fully tempered glass, scratch-resistant, impact-resistant and explosion-proof
Infrared Touch	Android OS: 20 Points, Windows OS: 40 Points
Interpolation Resolution	32768 x32768
Touch Accuracy	90% Central Area:±2mm
Touch Height	3mm
Response Time	4~11ms
Output Mode	HID Standard
Theory Clicks	Infinite
Minimum Touch Object	2 points ≥ 3mm / multi points ≥ 5mm
Connect Type	USB2.0 Full Speed
Weight	
MODE	TP-49
N.W.	40KG
G.W.	44.5KG
Size	
Product Size(L x Hx W)mm	1800×663.4×79
Package Size(L x Hx W)mm	1900×205×810
Standby power consumption	<3W
Accessories	
Accessories	Power Cord×1 Remote Control×1

